

4

3

2

1

ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

F


F

E

E

D

D

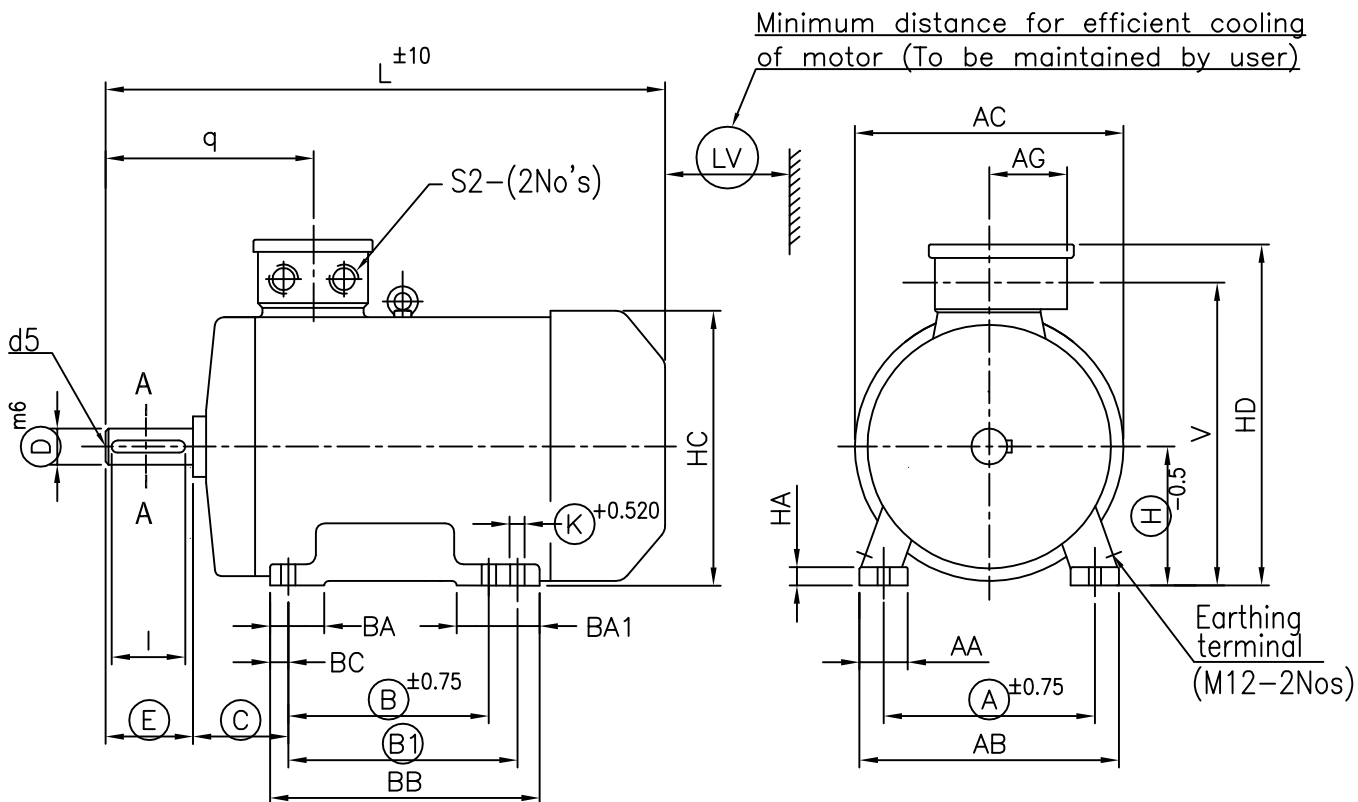

Fixing


General

IEC Frame	Pole	A	B	B1	C	H	K	AB	BB	AA	BA	BC	BA1	HA	HC	HD	L	LV	AC
280M	2	457	368	419	190	280	24	540	490	100	110	40	149	42	552	725	1010	115	544

C

C

T Box			Shaft						
V	q	AG	S2	D	E	F	GA	I	d5
638	360	243	2" B.S.C.	65	140	18	69	130	M20



Notes:-

- 1) Terminal box can be rotated in 360 deg in steps of 90 deg.
- 2) Ringed dimensions are as per IS:1231/IEC60072

B

B

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

A

A

NAME	DATE	TITLE:	
DRN	YCJ	07.04.2015	DIMENSION DRAWING
CHD			3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) SAFE AREA INDUCTION MOTOR
APPD			
Bharat Bijlee		DRG. No:	A28M231TC
AIROLI, NAVI MUMBAI			

4

3

2

1