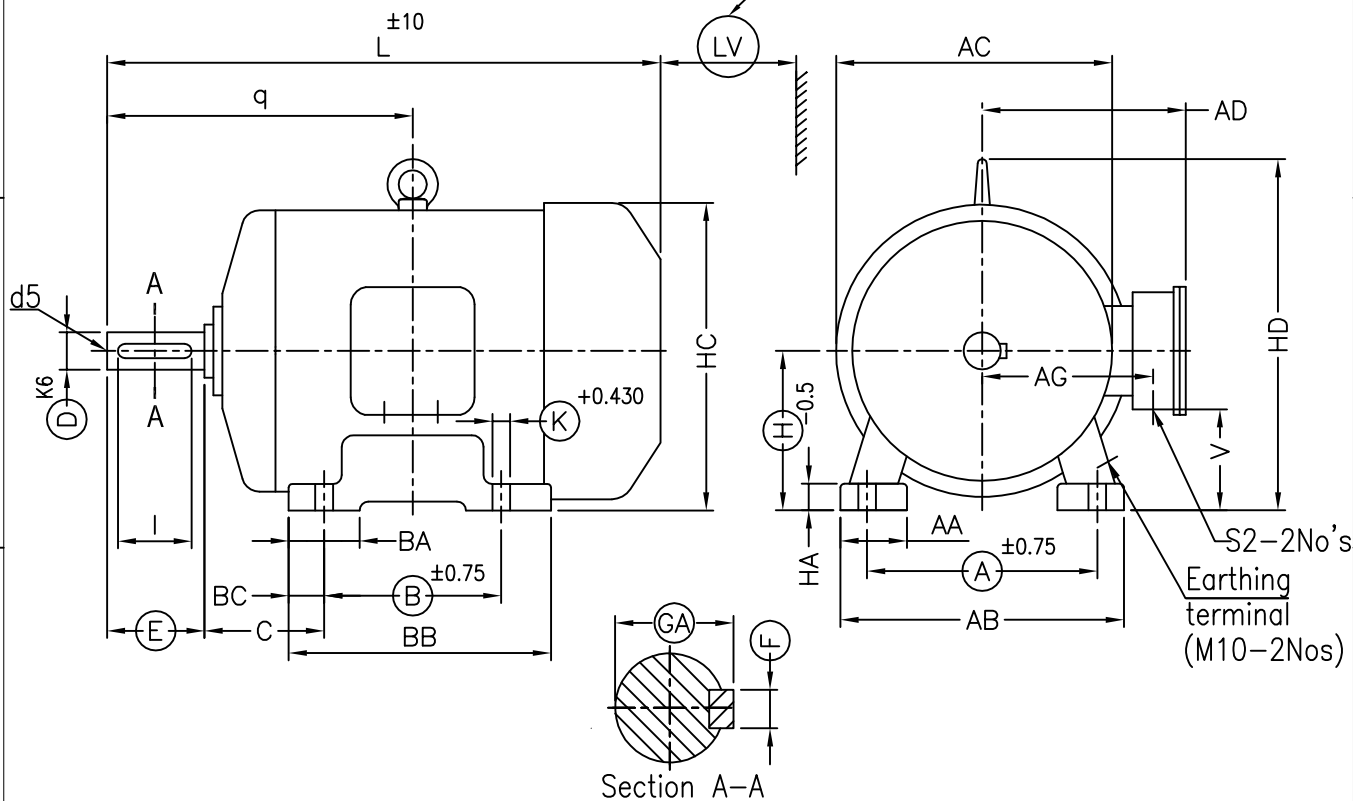


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED

SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

IEC Frame	Pole	Fixing					General										L	LV
		A	B	C	H	K	AB	BB	AA	BA	BC	HA	HC	HD	AD			
180M	4	279	241	121	180	15	344	281	65	70	23	26	357	412	265	698	70	
	2&6															679		

T Box					Shaft					
AC	V	q	AG	S2	D	E	F	GA	I	d5
354	83	352	216	1.5" B.S.C.	48	110	14	51.5	100	M16

Notes:-

- 1) Terminal box can be rotated in 360 deg in steps of 90 deg.
- 2) Ringed dimensions are as per IS:1231/IEC60072


Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

	NAME	DATE
DRN	YCJ	07.04.2015
CHD		
APPD		

TITLE:

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) INDUCTION MOTOR (SAFE AREA)



DRG. No:

A18M431RC

4

3

2

1