


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED


SCALE - N.T.S.

Minimum distance for efficient cooling
of motor (To be maintained by user)

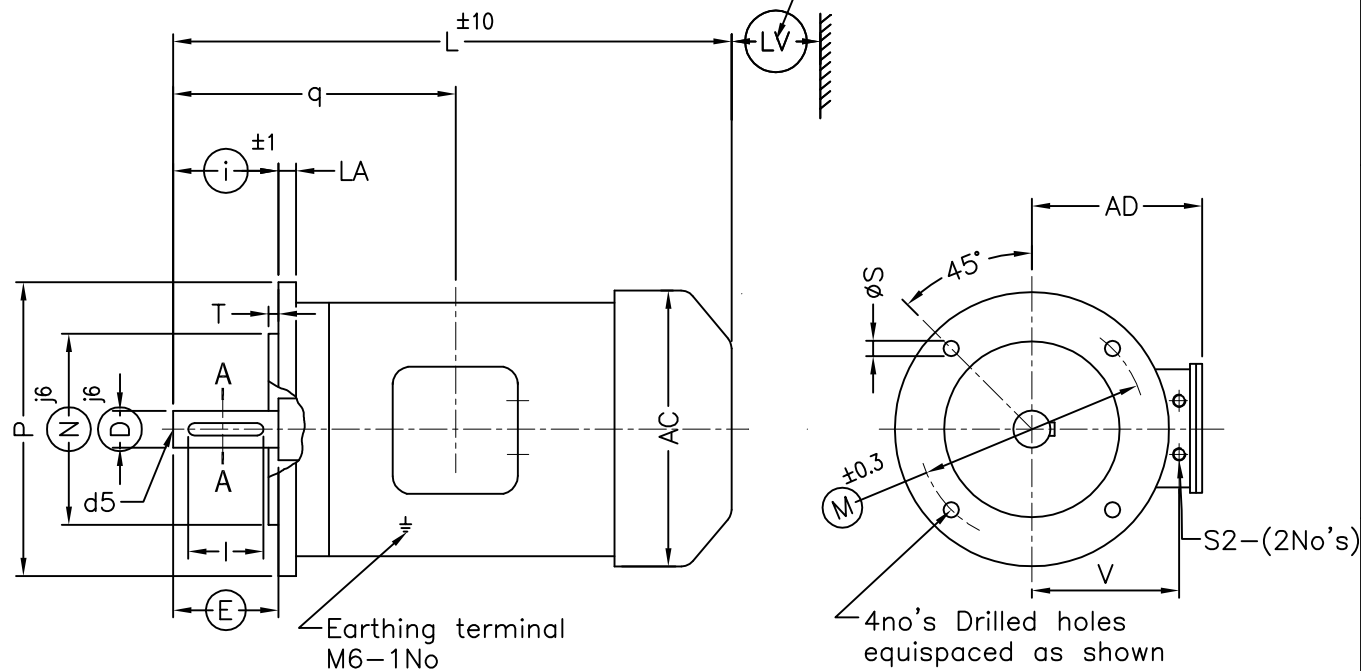

General										T box							
IEC Frame	Pole	P	N	M	i	S	T	LA	AD	AC	L	LV	g	V	q	AG	S2
225S	4	450	350	400	140	19	5	16	344	450	852	90	284	273	432.5	172	2" BSC
	6										802						

Shaft					
D	E	F	GA	I	d5
60	140	18	64	130	M20




Notes:-

- Terminal box can be rotated in 360 deg in steps of 90 deg.
- Ringed dimensions are as per IS:1231/IEC60072/IS:2223

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

NAME	DATE	TITLE:
DRN	YCJ	07.04.2015
CHD		
APPD		

Bharat Bijlee
AIROLI, NAVI MUMBAI



DRG. No:

A22S451RC