


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED


SCALE - N.T.S.

Minimum distance for efficient cooling of motor (To be maintained by user)

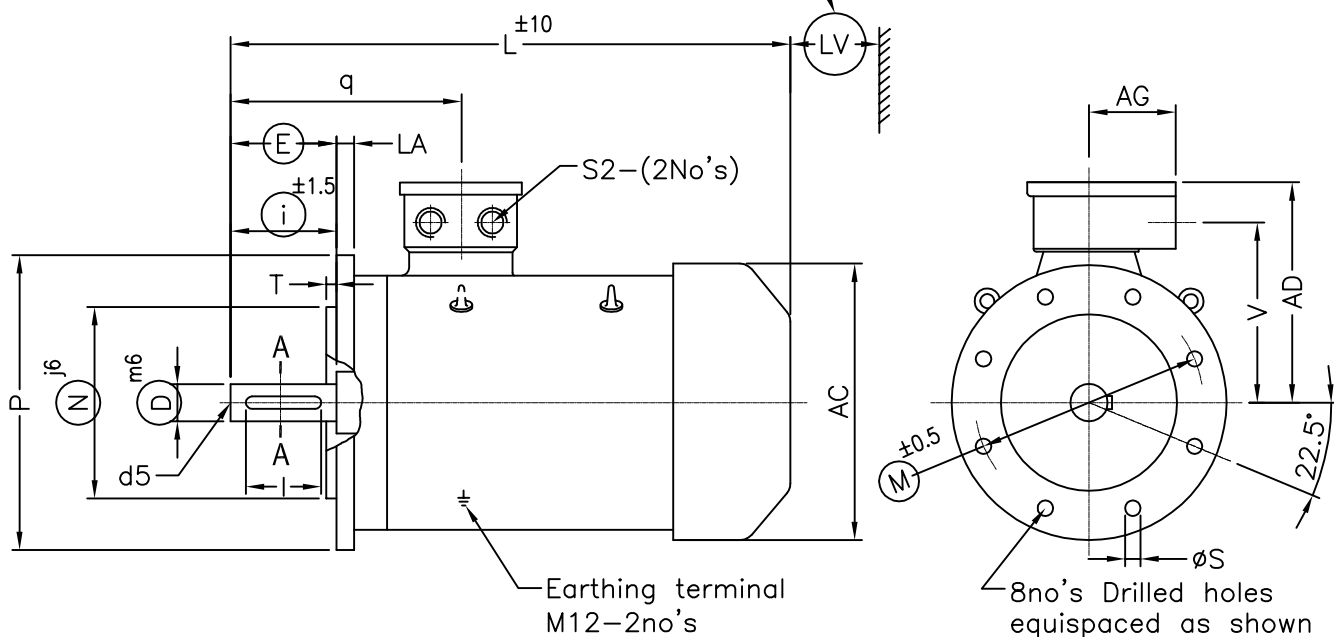

Fixing							General					T box				
IEC Frame	Pole	P	N	M	i	S	T	LA	AD	AC	L	LV	V	q	AG	S2
250M	2	550	450	500	140	19	5	18	415	489	993	100	328	352	243	2"B.S.C.

Shaft					
D	E	F	GA	I	d5
60	140	18	64	130	M20



Notes:-

1. Terminal box can be rotated in 360 deg in steps of 90 deg.
2. Ringed dimensions are as per IS:1231/IEC60072/IS:2223


AMENDED FOR DIMENSIONS--DNB--14.02.17

	NAME	DATE
DRN	YCJ	07.04.2015
CHD		
APPD		

TITLE:

DIMENSION DRAWING

3PH SQUIRREL CAGE, TEFC (FLANGE MOUNTED) INDUCTION MOTOR(SAFE AREA)



DRG. No:

A25M251TC[®]