
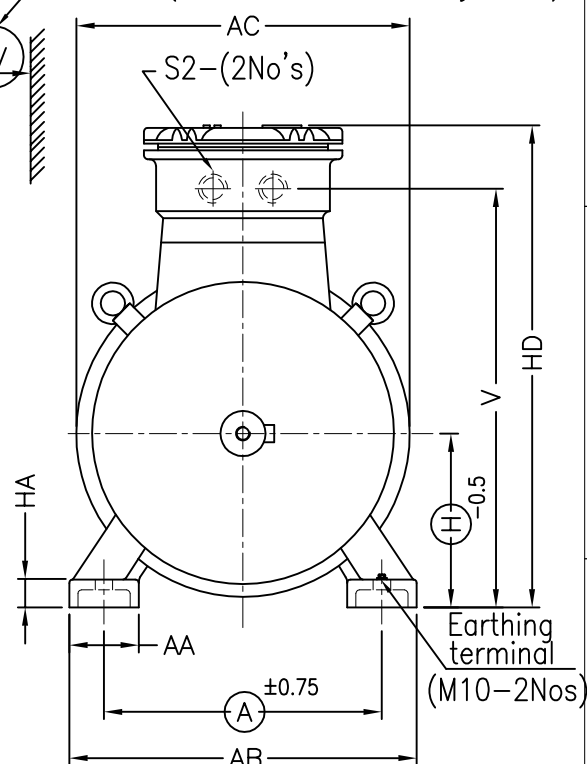


ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED



SCALE - N.T.S.

Minimum distance for efficient cooling of motor (To be maintained by user)

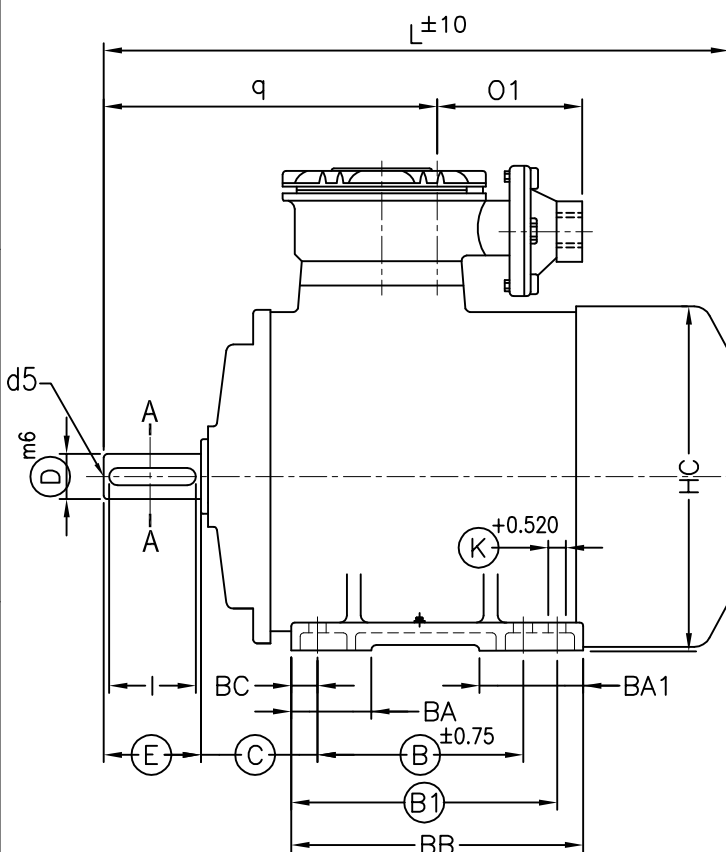

Fixing										General									
IEC Frame	Pole	A	B	B1	C	H	K	AB	BB	AA	BA	BC	BA1	HA	HC	HD	L	LV	AC
200L	4 6&8	318	305	-	133	200	19	398	355	85	85	28	-	32	397	556	771	80	394

T Box					Shaft					
V	O	O1	q	S2	D	E	F	GA	I	d5
488	237	133	395	M40x1.5P	55	110	16	59	100	M20



Notes:-

- 1) Ringed dimensions are as per IS:1231/IEC60072
- 2) Terminal box can be rotated in 360 deg in steps of 90 deg.

Customer		Project	
P.O. No.		Consultant	
kW/Pole		Client/Contractor	
Frame		Package	
SO No.		Tag no's	

① Total Length Changed--SLM--10.07.2017

NAME	DATE	TITLE:	
DRN	YCJ	DIMENSION DRAWING	
CHD		3PH SQUIRREL CAGE, TEFC (FOOT MOUNTED) FLAME PROOF(Ex'd') INDUCTION MOTOR	
APPD			
Bharat Bijlee AIROLI, NAVI MUMBAI		DRG. No:	D20L431TC ^①